


### Intellimod™ Module

Three Phase  
IGBT Inverter Output  
30 Amperes/600 Volts

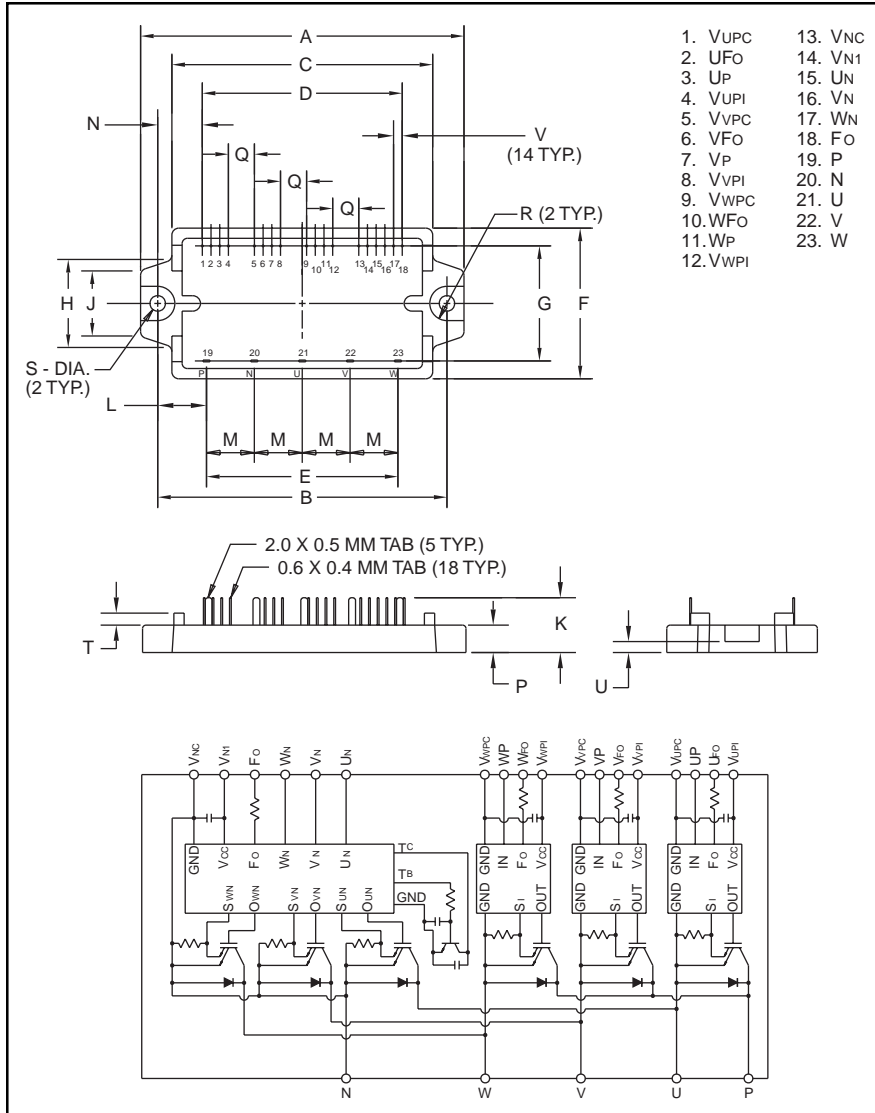

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	3.72±0.04	94.5±1.0
B	3.33±0.02	84.5±0.5
C	2.99	76.0
D	2.300±0.02	58.42±0.5
E	2.20±0.02	56.0±0.5
F	1.73±0.04	44.0±1.0
G	1.32±0.02	33.6±0.5
H	1.01	25.7
J	0.75	19.0
K	0.71±0.04	18.0±1.0

Dimensions	Inches	Millimeters
L	0.561	14.25
M	0.55±0.01	14.0±0.25
N	0.513	13.04
P	0.31±0.02	8.0±0.5
Q	0.300	7.62
R	0.20 Rad.	Rad. 5.0
S	0.18 Dia.	Dia. 4.5
T	0.14	3.5
U	0.13±0.02	3.2±0.5
V	0.100±0.01	2.54±0.25



#### Description:

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

#### Features:

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
  - Short Circuit
  - Over Current
  - Over Temperature
  - Under Voltage

#### Applications:

- Inverters
- UPS
- Motion/Servo Control
- Power Supplies

#### Ordering Information:

Example: Select the complete part number from the table below -i.e. PM30CSJ060 is a 600V, 30 Ampere Intellimod™ Intelligent Power Module.

Type	Current Rating Amperes	V <sub>CEs</sub> Volts (x 10)
PM	30	60



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM30CSJ060**  
**Intellimod™ Module**  
**Three Phase IGBT Inverter Output**  
**30 Amperes/600 Volts**

**Absolute Maximum Ratings,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	PM30CSJ060	Units
Power Device Junction Temperature	$T_j$	-20 to 150	$^\circ\text{C}$
Storage Temperature	$T_{\text{stg}}$	-40 to 125	$^\circ\text{C}$
Case Operating Temperature	$T_C$	-20 to 100	$^\circ\text{C}$
Mounting Torque, M4 Mounting Screws	—	13	in-lb
Module Weight (Typical)	—	60	Grams
Supply Voltage Protected by OC and SC ( $V_D = 13.5 - 16.5\text{V}$ , Inverter Part)	$V_{\text{CC(prot.)}}$	400	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	$V_{\text{RMS}}$	2500	Volts

**Control Sector**

Supply Voltage Applied between ( $V_{\text{UP1}}-V_{\text{U1PC}}$ , $V_{\text{VP1}}-V_{\text{V1PC}}$ , $V_{\text{WP1}}-V_{\text{W1PC}}$ , $V_{\text{N1}}-V_{\text{N1C}}$ )	$V_D$	20	Volts
Input Voltage Applied between ( $U_P$ , $V_P$ , $W_P$ , $U_N$ , $V_N$ , $W_N$ )	$V_{\text{CIN}}$	20	Volts
Fault Output Supply Voltage (Applied between $F_O$ and $V_C$ )	$V_{\text{FO}}$	20	Volts
Fault Output Current	$I_{\text{FO}}$	20	mA

**IGBT Inverter Sector**

Collector-Emitter Voltage ( $V_D = 15\text{V}$ , $V_{\text{CIN}} = 15\text{V}$ )	$V_{\text{CES}}$	600	Volts
Collector Current, $\pm$	$I_C$	30	Amperes
Peak Collector Current, $\pm$	$I_{\text{CP}}$	60	Amperes
Supply Voltage (Applied between P - N)	$V_{\text{CC}}$	450	Volts
Supply Voltage, Surge (Applied between P - N)	$V_{\text{CC(surge)}}$	500	Volts
Collector Dissipation	$P_C$	83	Watts



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM30CSJ060**  
**Intellimod™ Module**  
**Three Phase IGBT Inverter Output**  
**30 Amperes/600 Volts**

**Electrical and Mechanical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>Control Sector</b>						
Over Current Trip Level Inverter Part	OC	$-20^\circ\text{C} \leq T \leq 125^\circ\text{C}$	39	53	—	Amperes
Short Circuit Trip Level Inverter Part	SC	$-20^\circ\text{C} \leq T \leq 125^\circ\text{C}$	—	80	—	Amperes
Over Current Delay Time	$t_{\text{off(OC)}}$	$V_D = 15\text{V}$	—	10	—	$\mu\text{S}$
Over Temperature Protection	OT	Trip Level	100	110	120	$^\circ\text{C}$
	$OT_R$	Reset Level	—	90	—	$^\circ\text{C}$
Supply Circuit Under Voltage Protection	UV	Trip Level	11.5	12.0	12.5	Volts
	$UV_R$	Reset Level	—	12.5	—	Volts
Supply Voltage	$V_D$	Applied between $V_{UP1}-V_{UPC}$ , $V_{VP1}-V_{VPC}$ , $V_{WP1}-V_{WPC}$ , $V_{N1}-V_{NC}$	13.5	15	16.5	Volts
Circuit Current	$I_D$	$V_D = 15\text{V}$ , $V_{CIN} = 15\text{V}$ , $V_{N1}-V_{NC}$	—	18	25	mA
		$V_D = 15\text{V}$ , $V_{CIN} = 15\text{V}$ , $V_{XP1}-V_{XPC}$	—	7	10	mA
Input ON Threshold Voltage	$V_{CIN(\text{on})}$	Applied between	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	$V_{CIN(\text{off})}$	$U_P, V_P, W_P, U_N, V_N, W_N$	1.7	2.0	2.3	Volts
PWM Input Frequency	$f_{\text{PWM}}$	3- $\phi$ Sinusoidal	—	15	20	kHz
Fault Output Current	$I_{\text{FO(H)}}$	$V_D = 15\text{V}$ , $V_{\text{FO}} = 15\text{V}$	—	—	0.01	mA
	$I_{\text{FO(L)}}$	$V_D = 15\text{V}$ , $V_{\text{FO}} = 15\text{V}$	—	10	15	mA
Minimum Fault Output Pulse Width	$t_{\text{FO}}$	$V_D = 15\text{V}$	1.0	1.8	—	mS

**PM30CSJ060**  
**Intellimod™ Module**  
**Three Phase IGBT Inverter Output**  
**30 Amperes/600 Volts**

## Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>IGBT Inverter Sector</b>						
Collector Cutoff Current	$I_{CEX}$	$V_{CE} = V_{CEX}, T_j = 25^\circ\text{C}$	—	—	1.0	mA
		$V_{CE} = V_{CEX}, T_j = 125^\circ\text{C}$	—	—	10	mA
Diode Forward Voltage	$V_{FM}$	$-I_C = 30\text{A}, V_D = 15\text{V}, V_{CIN} = 15\text{V}$	—	2.5	3.5	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 30\text{A}$	—	1.8	2.5	Volts
		$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 30\text{A}, T_j = 125^\circ\text{C}$	—	1.9	2.6	Volts
Inductive Load Switching Times	$t_{on}$	$V_D = 15\text{V}, V_{CIN} = 0 \sim 15\text{V}$ $V_{CC} = 300\text{V}, I_C = 30\text{A}$ $T_j = 125^\circ\text{C}$	0.3	0.6	1.5	$\mu\text{S}$
	$t_{rr}$		—	0.12	0.3	$\mu\text{S}$
	$t_{C(on)}$		—	0.3	1.0	$\mu\text{S}$
	$t_{off}$		—	2.0	2.8	$\mu\text{S}$
	$t_{C(off)}$		—	0.6	1.5	$\mu\text{S}$

## Thermal Characteristics

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Each IGBT	—	—	1.5	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Each FWDi	—	—	3.0	$^\circ\text{C/Watt}$
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module, Thermal Grease Applied	—	—	0.083	$^\circ\text{C/Watt}$

## Recommended Conditions for Use


Characteristic	Symbol	Condition	Value	Units
Supply Voltage	$V_{CC}$	Applied across P-N Terminals	0 ~ 400	Volts
	$V_D$	Applied between $V_{UP1}-V_{UPC},$ $V_{N1}-V_{NC}, V_{VP1}-V_{VPC}, V_{WP1}-V_{WPC}$	$15 \pm 1.5$	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between	0 ~ 0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$	$U_P, V_P, W_P, U_N, V_N, W_N$	$4.0 \sim V_D$	Volts
PWM Input Frequency	$f_{PWM}$	Using Application Circuit	5 ~ 20	kHz
Minimum Dead Time	$t_{DEAD}$	Input Signal	$\geq 2.0$	$\mu\text{S}$




Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM30CSJ060**  
**Intellimod™ Module**  
**Three Phase IGBT Inverter Output**  
**30 Amperes/600 Volts**


**SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)**

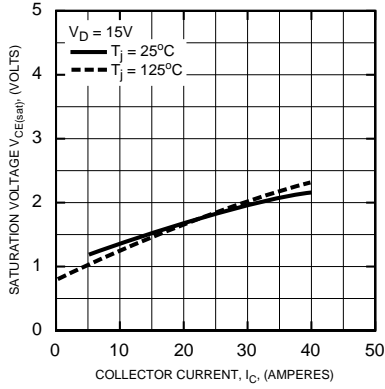


**COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)**

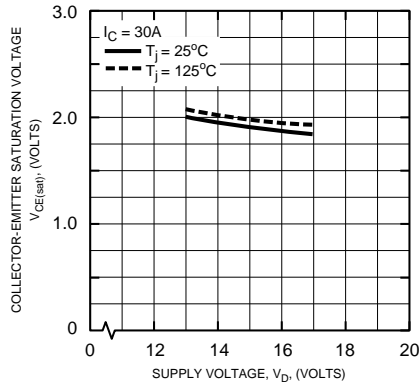


**OUTPUT CHARACTERISTICS (TYPICAL)**

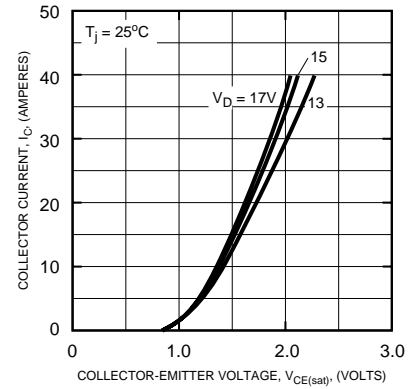


**SWITCHING TIME VS. COLLECTOR CURRENT (TYPICAL)**

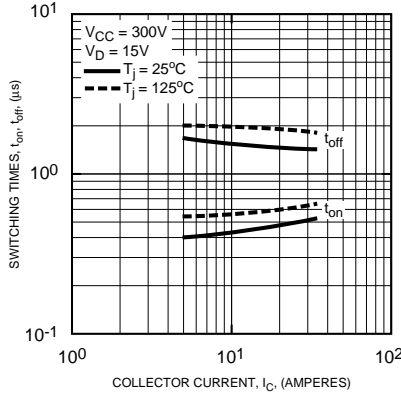


**SWITCHING TIME VS. COLLECTOR CURRENT (TYPICAL)**

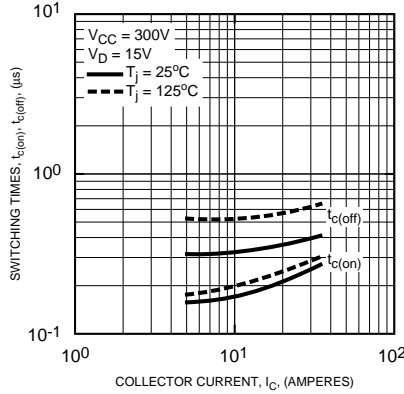


**REVERSE RECOVERY CURRENT VS. COLLECTOR CURRENT (TYPICAL)**

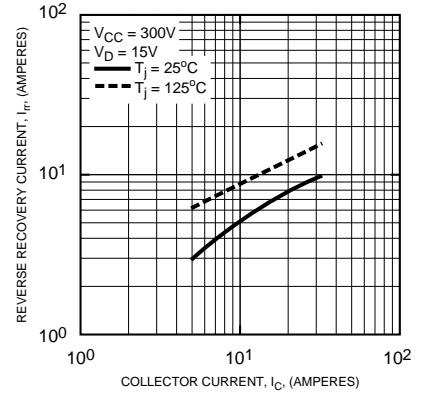


**DIODE FORWARD CHARACTERISTICS**

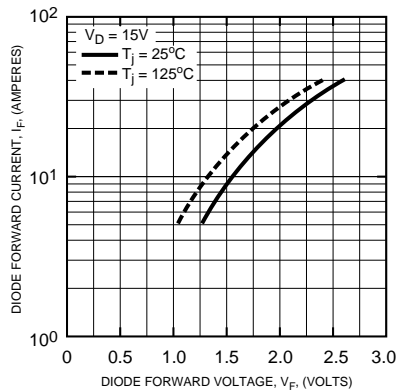

**OVER CURRENT TRIP LEVEL VS. SUPPLY VOLTAGE (TYPICAL)**

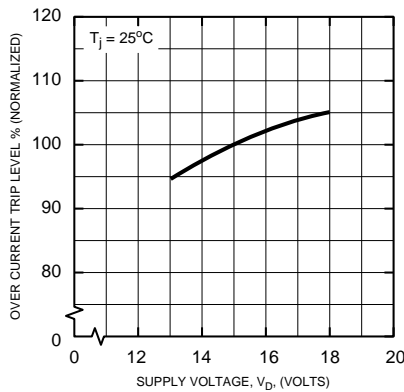


**OVER CURRENT TRIP LEVEL VS. TEMPERATURE (TYPICAL)**

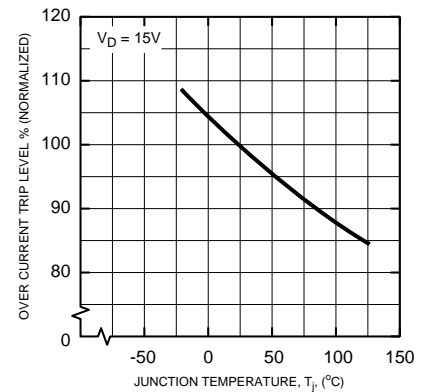


**PM30CSJ060**  
**Intellimod™ Module**  
**Three Phase IGBT Inverter Output**  
 30 Amperes/600 Volts


**FAULT OUTPUT PULSE WIDTH VS. TEMPERATURE (TYPICAL)**

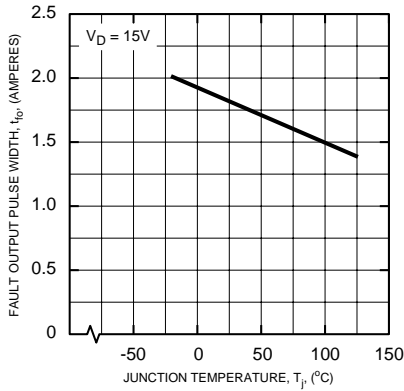

**CONTROL SUPPLY VOLTAGE TRIP-RESET LEVEL TEMPERATURE DEPENDENCY (TYPICAL)**

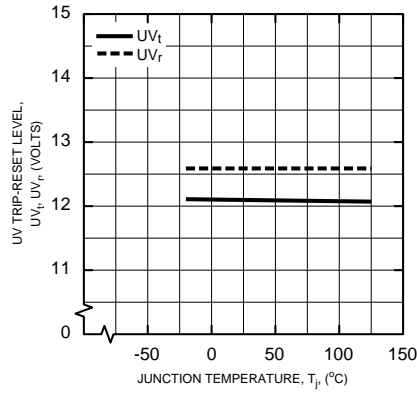

**TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT)**

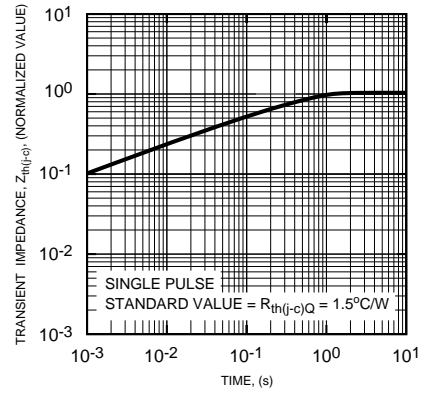

**TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (FWD)**

