


### Intellimod™ Module


Three Phase + Brake  
IGBT Inverter Output  
75 Amperes/600 Volts

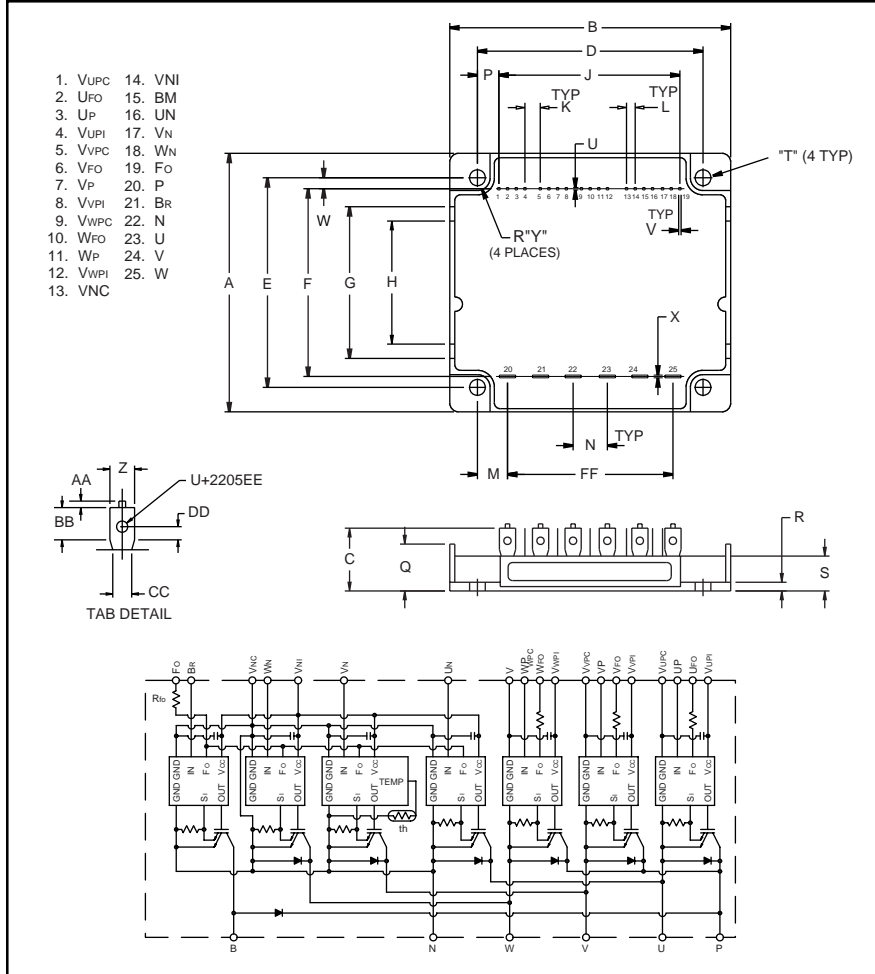

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	2.76±0.04	70.0±1.0
B	4.29±0.04	109.0±1.0
C	0.83±0.04	21.0±1.0
D	3.78±0.02	96.0±0.5
E	2.31±0.02	58.5±0.5
F	2.22±0.03	56.5±0.8
G	1.61	41.0
H	1.30	33.0
J	2.40±0.03	60.96±0.8
K	0.30	7.62
L	0.10±0.01	2.54±0.25
M	0.66	16.75
N	0.49±0.01	12.5±0.25
P	0.69	17.52
Q	0.53	13.5

Dimensions	Inches	Millimeters
R	0.21	5.4
S	0.39	10.0
T	0.18	4.5
U	0.02	0.6
V	0.02	0.4
W	0.03	0.75
X	0.03	0.8
Y	0.20	5.0
Z	0.25	6.35
AA	0.04	1.0
BB	0.39	9.95
CC	0.24	6.0
DD	0.21	5.4
EE	0.07	1.65
FF	2.46±0.03	62.5±0.08

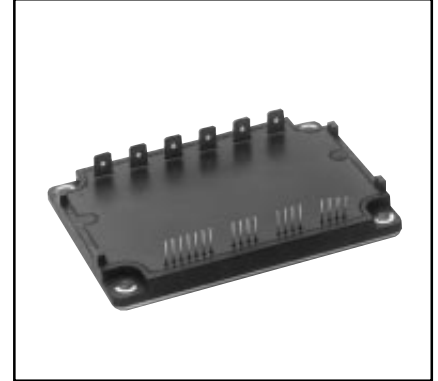

#### Description:

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free wheel diode power devices.

#### Features:

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
  - Short Circuit
  - Over Current
  - Over Temperature
  - Under Voltage

#### Applications:

- Inverters
- UPS
- Motion/Servo Control
- Power Supplies

#### Ordering Information:

Example: Select the complete part number from the table below -i.e. PM75RSK060 is a 600V, 75 Ampere Intellimod™ Intelligent Power Module.

Type	Current Rating Amperes	V <sub>CEs</sub> Volts (x 10)
PM	75	60



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM75RSK060**  
**Intellimod™ Module**  
**Three Phase + Brake IGBT Inverter Output**  
**75 Amperes/600 Volts**

**Absolute Maximum Ratings,  $T_j = 25\text{ °C}$  unless otherwise specified**

Characteristics	Symbol	PM25RSK120	Units
Junction Temperature	$T_j$	-20 to 150	°C
Storage Temperature	$T_{stg}$	-40 to 125	°C
Case Operating Temperature	$T_C$	-20 to 100	°C
Mounting Torque M4 Mounting Screws	-	13	in-lb
Module Weight (Typical)	-	150	Grams
Supply Voltage Protected by OC and SC ( $V_D = 13.5 \sim 16.5V$ , Inverter Part)	$V_{CC(prot)}$	400	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	$V_{RMS}$	2500	Volts

**Control Sector**

Supply Voltage Applied between ( $V_{UP1}-V_{U1PC}$ , $V_{VP1}-V_{V1PC}$ , $V_{WP1}-V_{W1PC}$ , $V_{N1}-V_{N1C}$ )	$V_D$	20	Volts
Input Voltage Applied between ( $U_P$ , $V_P$ , $W_P$ , $U_N$ , $V_N$ , $W_N$ , $B_r$ )	$V_{CIN}$	20	Volts
Fault Output Supply Voltage (Applied between $F_O$ and $V_{NC}$ )	$V_{FO}$	20	Volts
Fault Output Current	$I_{FO}$	20	mA

**IGBT Inverter Sector**

Collector-Emitter Voltage ( $V_D = 15V$ , $V_{CIN} = 15V$ )	$V_{CES}$	600	Volts
Collector Current, $\pm$	$I_C$	75	Amperes
Peak Collector Current, $\pm$	$I_{CP}$	150	Amperes
Supply Voltage (Applied between P-N)	$V_{CC}$	450	Volts
Supply Voltage, Surge (Applied between P-N, Surge Value)	$V_{CC (surge)}$	500	Volts
Collector Dissipation	$P_C$	125	Watts

**Brake Sector**

Collector-Emitter Voltage ( $V_D = 15V$ , $V_{CIN} = 15V$ )	$V_{CES}$	600	Volts
Collector Current, $\pm$	$I_C$	30	Amperes
Peak Collector Current, $\pm$	$I_{CP}$	60	Amperes
Supply Voltage (Applied between P-N)	$V_{CC}$	450	Volts
Supply Voltage, Surge (Applied between P-N, Surge Value)	$V_{CC (surge)}$	500	Volts
Collector Dissipation	$P_C$	75	Watts
Diode Forward Current	$I_F$	30	Amperes
Diode DC Reverse Voltage	$V_{R(DC)}$	600	Volts

**PM75RSK060**  
**Intellimod™ Module**  
**Three Phase + Brake IGBT Inverter Output**  
**75 Amperes/600 Volts**

## Electrical and Mechanical Characteristics, $T_j = 25\text{ °C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>Control Sector</b>						
Over Current Trip Level Inverter Part	OC	$-20\text{ °C} \leq T_j \leq 125\text{ °C}$	115	161	–	Amperes
Over Current Trip Level Brake Part			39	53	–	Amperes
Short Circuit Trip Level Inverter Part	SC	$-20\text{ °C} \leq T_j \leq 125\text{ °C}$	–	241	–	Amperes
Short Circuit Trip Level Brake Part			–	79	–	Amperes
Over Current Delay Time	$t_{\text{off(OC)}}$	$V_D = 15\text{V}$	–	10	–	$\mu\text{S}$
Over Temperature Protection	OT	Trip Level	100	110	120	$\text{°C}$
	$\text{OT}_R$	Reset Level	–	90	–	$\text{°C}$
Supply Circuit Under Voltage Protection	UV	Trip Level	11.5	12.0	12.5	Volts
	$\text{UV}_R$	Reset Level	–	12.5	–	Volts
Supply Voltage	$V_D$	Applied between $V_{\text{UP1}}-V_{\text{UPC}}$ , $V_{\text{VP1}}-V_{\text{VPC}}$ , $V_{\text{WP1}}-V_{\text{WPC}}$ , $V_{\text{N1}}-V_{\text{NC}}$	13.5	15.0	16.5	Volts
Circuit Current	$I_D$	$V_D = 15\text{V}$ , $V_{\text{CIN}} = 15\text{V}$ , $V_{\text{N1}}-V_{\text{NC}}$	–	44	60	mA
		$V_D = 15\text{V}$ , $V_{\text{CIN}} = 15\text{V}$ , $V_{\text{XP1}}-V_{\text{XPC}}$	–	13	18	mA
Input ON Threshold Voltage	$V_{\text{CIN(on)}}$	Applied between	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	$V_{\text{CIN(off)}}$	$U_P, V_P, W_P, U_N, V_N, W_N, B_r$	1.7	2.0	2.3	Volts
PWM Input Frequency	$f_{\text{PWM}}$	3- $\emptyset$ Sinusoidal	5	15	20	kHz
Fault Output Current	$I_{\text{FO(H)}}$	$V_D = 15\text{V}$ , $V_{\text{FO}} = 15\text{V}$	–	–	0.01	mA
	$I_{\text{FO(L)}}$	$V_D = 15\text{V}$ , $V_{\text{FO}} = 15\text{V}$	–	10	15	mA
Minimum Fault Output Pulse Width	$t_{\text{FO}}$	$V_D = 15\text{V}$	1.0	1.8	–	mS

**PM75RSK060**  
**Intellimod™ Module**  
**Three Phase + Brake IGBT Inverter Output**  
**75 Amperes/600 Volts**

## Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>IGBT Inverter Sector</b>						
Collector-Emitter Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}, V_D = 15\text{V}, T_j = 25^\circ\text{C}$	-	-	1	mA
		$V_{CE} = V_{CES}, V_D = 15\text{V}, T_j = 125^\circ\text{C}$	-	-	10	mA
FWDi Forward Voltage	$V_{EC}$	$-I_C = 75\text{A}, V_D = 15\text{V}, V_{CIN} = 15\text{V}$	-	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 75\text{A}, T_j = 25^\circ\text{C}$	-	1.8	2.7	Volts
		$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 75\text{A}, T_j = 125^\circ\text{C}$	-	1.85	2.78	Volts
Inductive Load Switching Times	$t_{on}$		0.4	0.8	2.0	$\mu\text{S}$
	$t_{rr}$	$V_D = 15\text{V}, V_{CIN} = 0 \sim 15\text{V},$	-	0.15	0.3	$\mu\text{S}$
	$t_{C(on)}$	$V_{CC} = 300\text{V}, I_C = 75\text{A},$	-	0.4	1.0	$\mu\text{S}$
	$t_{off}$	$T_j = 125^\circ\text{C}, \text{ Inductive Load}$	-	2.0	2.9	$\mu\text{S}$
	$t_{C(off)}$		-	0.5	1.0	$\mu\text{S}$

## Brake Sector

Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 30\text{A}, T_j = 25^\circ\text{C}$	-	1.8	2.7	Volts
		$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 30\text{A}, T_j = 125^\circ\text{C}$	-	1.9	2.8	Volts
FWDi Forward Voltage	$V_{EC}$	$-I_C = 15\text{A}, V_D = 15\text{V}, V_{CIN} = 15\text{V}$	-	1.7	2.7	Volts
Collector-Emitter Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}, V_D = 15\text{V}, T_j = 25^\circ\text{C}$	-	-	1	mA
		$V_{CE} = V_{CES}, V_D = 15\text{V}, T_j = 125^\circ\text{C}$	-	-	10	mA

## Thermal Characteristics








Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Each Inverter IGBT	-	-	1.0	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Each Inverter FWDi	-	-	0.95	$^\circ\text{C/Watt}$
	$R_{th(j-c)Q}$	Each Brake IGBT	-	-	1.66	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Each Brake FWDi	-	-	1.9	$^\circ\text{C/Watt}$
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module Thermal Grease Applied	-	-	0.036	$^\circ\text{C/Watt}$

## Recommended Conditions for Use

Characteristic	Symbol	Condition	Value	Units
Supply Voltage	$V_{CC}$	Applied across P-N Terminals	0 ~ 800	Volts
	$V_D$	Applied between $V_{UP1}-V_{UPC}, V_{N1}-V_{NC}, V_{VP1}-V_{VPC}, V_{WP1}-V_{WPC}$	$15 \pm 1.5$	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between	0 ~ 0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$	$U_P, V_P, W_P, U_N, V_N, W_N, B_r$	$4.0 \sim V_D$	Volts
PWM Input Frequency	$f_{PWM}$	Using Application Circuit	5 ~ 20	kHz
Minimum Dead Time	$t_{DEAD}$	Input Signal	$\geq 2.5$	$\mu\text{S}$



**PM75RSK060**  
**Intellimod™ Module**  
**Three Phase + Brake IGBT Inverter Output**  
**75 Amperes/600 Volts**

**Inverter Sector**

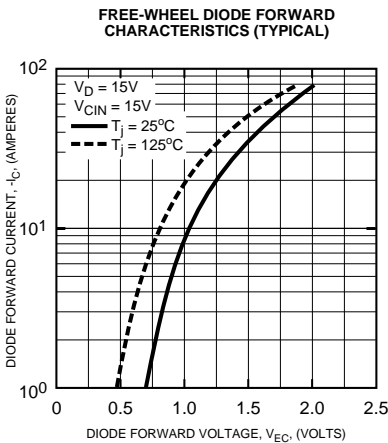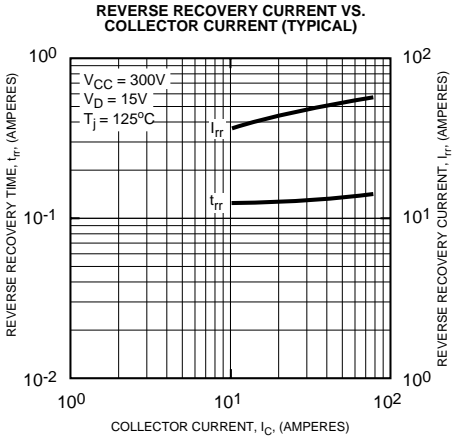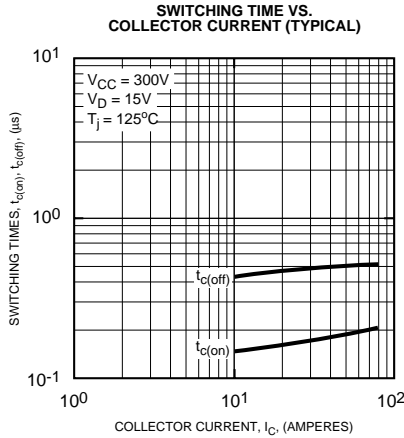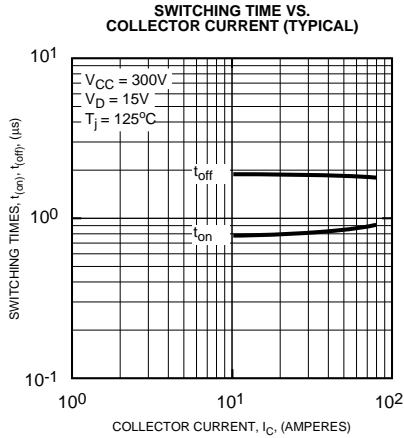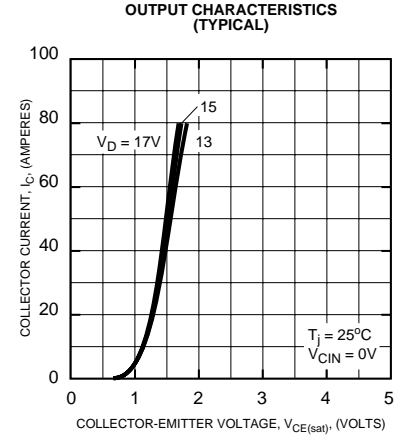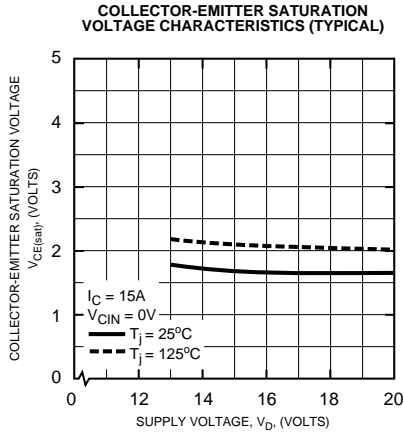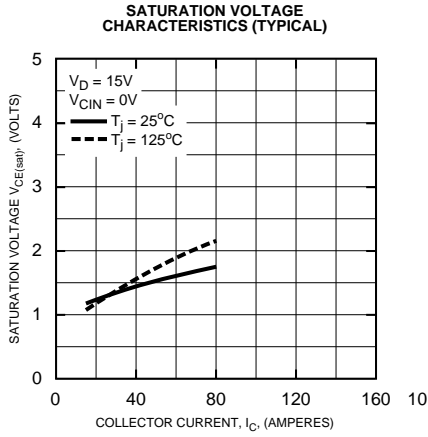

**PM75RSK060**  
**Intellimod™ Module**  
**Three Phase + Brake IGBT Inverter Output**  
**75 Amperes/600 Volts**

**Inverter Sector**

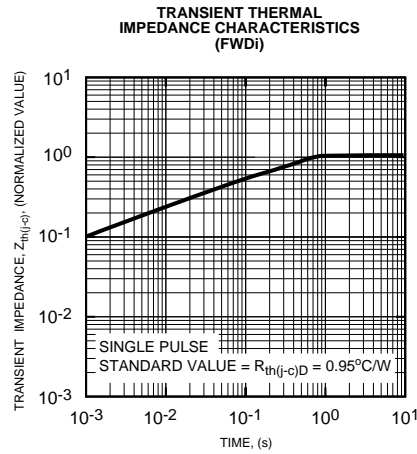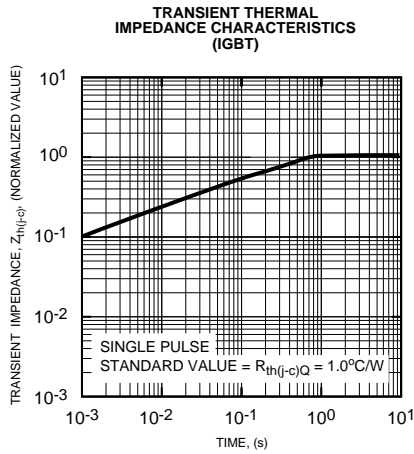

**Brake Sector**

