


# PM75RSK060

FLAT-BASE TYPE  
INSULATED PACKAGE

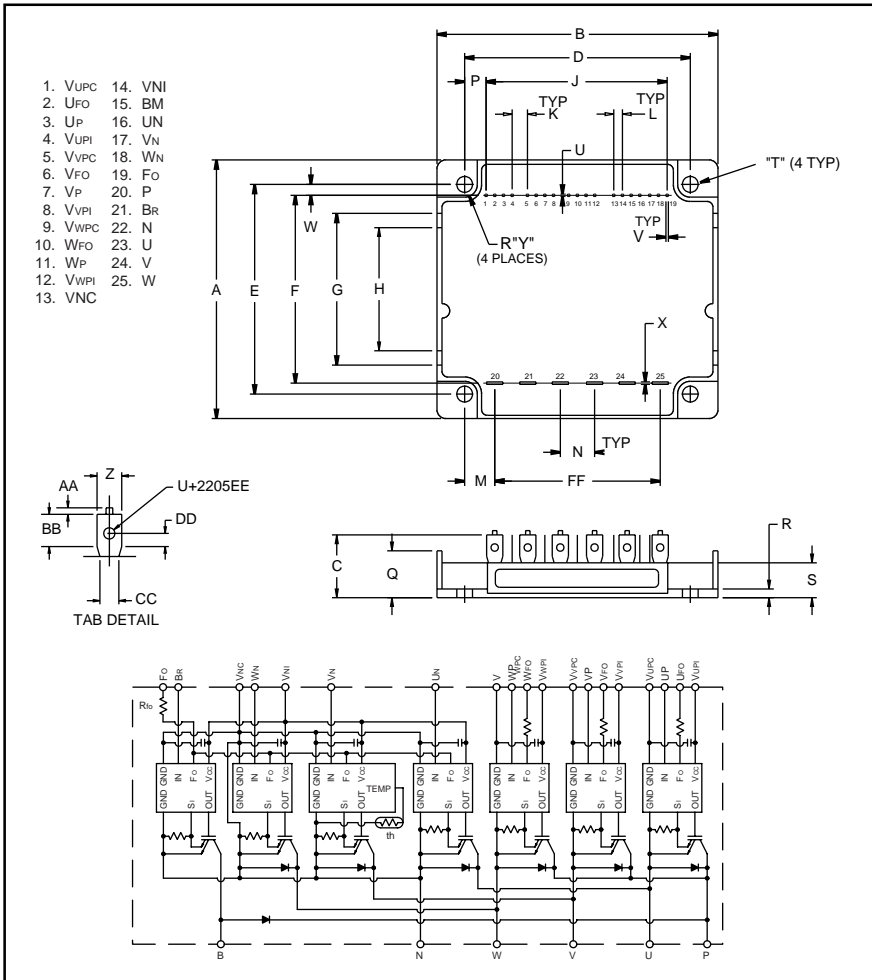

**Description:**

Mitsubishi Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free wheel diode power devices.

**Features:**

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
  - Short Circuit
  - Over Current
  - Over Temperature
  - Under Voltage

**Applications:**

- Inverters
- UPS
- Motion/Servo Control
- Power Supplies

**Ordering Information:**

Example: Select the complete part number from the table below -i.e. PM75RSK060 is a 600V, 75 Ampere Intelligent Power Module.

Type	Current Rating Amperes	V <sub>CES</sub> Volts (x 10)
PM	75	60

**Outline Drawing and Circuit Diagram**

Dimensions	Inches	Millimeters
A	2.76±0.04	70.0±1.0
B	4.29±0.04	109.0±1.0
C	0.83±0.04	21.0±1.0
D	3.78±0.02	96.0±0.5
E	2.31±0.02	58.5±0.5
F	2.22±0.03	56.5±0.8
G	1.61	41.0
H	1.30	33.0
J	2.40±0.03	60.96±0.8
K	0.30	7.62
L	0.10±0.01	2.54±0.25
M	0.66	16.75
N	0.49±0.01	12.5±0.25
P	0.69	17.52
Q	0.53	13.5

Dimensions	Inches	Millimeters
R	0.21	5.4
S	0.39	10.0
T	0.18	4.5
U	0.02	0.6
V	0.02	0.4
W	0.03	0.75
X	0.03	0.8
Y	0.20	5.0
Z	0.25	6.35
AA	0.04	1.0
BB	0.39	9.95
CC	0.24	6.0
DD	0.21	5.4
EE	0.07	1.65
FF	2.46±0.03	62.5±0.8

**PM75RSK060**FLAT-BASE TYPE  
INSULATED PACKAGE**Absolute Maximum Ratings,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

Ratings	Symbol	PM75RSK060	Units
Junction Temperature	$T_j$	-20 to 150	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-40 to 125	$^\circ\text{C}$
Case Operating Temperature	$T_C$	-20 to 100	$^\circ\text{C}$
Mounting Torque M4 Mounting Screws	-	0.98 ~ 1.47	N · m
Module Weight (Typical)	-	150	Grams
Supply Voltage Protected by OC and SC ( $V_D = 13.5 \sim 16.5\text{V}$ , Inverter Part)	$V_{CC(prot)}$	400	Volts
Isolation Voltage (Main Terminal to Baseplate, AC 1 min.)	$V_{iso}$	2500	Vrms

**Control Sector**

Supply Voltage (Applied between $V_{UP1}$ - $V_{UPC}$ , $V_{VP1}$ - $V_{VPC}$ , $V_{WP1}$ - $V_{WPC}$ , $V_{N1}$ - $V_{NC}$ )	$V_D$	20	Volts
Input Voltage (Applied between $U_P$ - $V_{UPC}$ , $V_P$ - $V_{VPC}$ , $W_P$ - $V_{WPC}$ , $U_N$ · $V_N$ · $W_N$ · $B_r$ - $V_{NC}$ )	$V_{CIN}$	20	Volts
Fault Output Supply Voltage (Applied between $U_{FO}$ - $V_{UPC}$ , $V_{FO}$ - $V_{VPC}$ , $W_{FO}$ - $V_{WPC}$ , $F_O$ - $V_{NC}$ )	$V_{FO}$	20	Volts
Fault Output Current (Sink Current of $U_{FO}$ , $V_{FO}$ , $W_{FO}$ and $F_O$ Terminal)	$I_{FO}$	20	mA

**IGBT Inverter Sector**

Collector-Emitter Voltage ( $V_D = 15\text{V}$ , $V_{CIN} = 15\text{V}$ )	$V_{CES}$	600	Volts
Collector Current, $\pm$	$I_C$	75	Amperes
Peak Collector Current, $\pm$	$I_{CP}$	150	Amperes
Supply Voltage (Applied between P-N)	$V_{CC}$	450	Volts
Supply Voltage, Surge (Applied between P-N, Surge Value)	$V_{CC(surge)}$	500	Volts
Collector Dissipation	$P_C$	125	Watts

**Brake Sector**

Collector-Emitter Voltage ( $V_D = 15\text{V}$ , $V_{CIN} = 15\text{V}$ )	$V_{CES}$	600	Volts
Collector Current, ( $T_C = 25\text{ }^\circ\text{C}$ )	$I_C$	30	Amperes
Peak Collector Current, ( $T_C = 25\text{ }^\circ\text{C}$ )	$I_{CP}$	60	Amperes
Supply Voltage (Applied between P-N)	$V_{CC}$	450	Volts
Supply Voltage, Surge (Applied between P-N, Surge Value)	$V_{CC(surge)}$	500	Volts
Collector Dissipation	$P_C$	75	Watts
Diode Forward Current	$I_F$	30	Amperes
Diode DC Reverse Voltage	$V_{R(DC)}$	600	Volts

**PM75RSK060**

FLAT-BASE TYPE  
INSULATED PACKAGE

**Electrical and Mechanical Characteristics,  $T_j = 25\text{ }^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>Control Sector</b>						
Over Current Trip Level Inverter Part	OC	$-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ , $V_D = 15\text{V}$	115	161	–	Amperes
Over Current Trip Level Brake Part			39	53	–	Amperes
Short Circuit Trip Level Inverter Part	SC	$-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ , $V_D = 15\text{V}$	–	241	–	Amperes
Short Circuit Trip Level Brake Part			–	79	–	Amperes
Over Current Delay Time	$t_{\text{off(OC)}}$	$V_D = 15\text{V}$	–	10	–	$\mu\text{s}$
Over Temperature Protection	OT	Trip Level	100	110	120	$^\circ\text{C}$
	$OT_r$	Reset Level	–	90	–	$^\circ\text{C}$
Supply Circuit Under Voltage Protection	UV	Trip Level	11.5	12.0	12.5	Volts
	$UV_r$	Reset Level	–	12.5	–	Volts
Supply Voltage	$V_D$	Applied between $V_{UP1}-V_{UPC}$ , $V_{VP1}-V_{VPC}$ , $V_{WP1}-V_{WPC}$ , $V_{N1}-V_{NC}$	13.5	15.0	16.5	Volts
Circuit Current	$I_D$	$V_D = 15\text{V}$ , $V_{CIN} = 15\text{V}$ , $V_{N1}-V_{NC}$	–	44	60	mA
		$V_D = 15\text{V}$ , $V_{CIN} = 15\text{V}$ , $V_{XP1}-V_{XPC}$	–	13	18	mA
Input ON Threshold Voltage	$V_{\text{th(on)}}$	Applied between	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	$V_{\text{th(off)}}$	$U_P-V_{UPC}$ , $V_P-V_{VPC}$ , $W_P-V_{WPC}$ , $U_N \cdot V_N \cdot W_N \cdot B_r-V_{NC}$	1.7	2.0	2.3	Volts
PWM Input Frequency	$f_{\text{PWM}}$	3- $\phi$ Sinusoidal	5	15	20	kHz
Fault Output Current	$I_{\text{FO(H)}}$	$V_D = 15\text{V}$ , $V_{\text{FO}} = 15\text{V}$	–	–	0.01	mA
	$I_{\text{FO(L)}}$	$V_D = 15\text{V}$ , $V_{\text{FO}} = 15\text{V}$	–	10	15	mA
Minimum Fault Output Pulse Width	$t_{\text{FO}}$	$V_D = 15\text{V}$	1.0	1.8	–	ms

**PM75RSK060**

**FLAT-BASE TYPE  
INSULATED PACKAGE**

**Electrical and Mechanical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>IGBT Inverter Sector</b>						
Collector-Emitter Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}, V_D = 15\text{V}, T_j = 25^\circ\text{C}$	-	-	1	mA
		$V_{CE} = V_{CES}, V_D = 15\text{V}, T_j = 125^\circ\text{C}$	-	-	10	mA
FWDi Forward Voltage	$V_{EC}$	$-I_C = 75\text{A}, V_D = 15\text{V}, V_{CIN} = 15\text{V}$	-	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 75\text{A}, T_j = 25^\circ\text{C}$	-	1.8	2.7	Volts
		$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 75\text{A}, T_j = 125^\circ\text{C}$	-	1.85	2.78	Volts
Inductive Load Switching Times	$t_{on}$		0.4	0.8	2.0	$\mu\text{s}$
	$t_{rr}$	$V_D = 15\text{V}, V_{CIN} = 0 \leftrightarrow 15\text{V}$	-	0.15	0.3	$\mu\text{s}$
	$t_{C(on)}$	$V_{CC} = 300\text{V}, I_C = 75\text{A}$	-	0.4	1.0	$\mu\text{s}$
	$t_{off}$	$T_j = 125^\circ\text{C}$ , Inductive Load	-	2.0	2.9	$\mu\text{s}$
	$t_{C(off)}$		-	0.5	1.0	$\mu\text{s}$

**Brake Sector**

Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 30\text{A}, T_j = 25^\circ\text{C}$	-	1.8	2.7	Volts
		$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 30\text{A}, T_j = 125^\circ\text{C}$	-	1.9	2.8	Volts
FWDi Forward Voltage	$V_{FM}$	$I_F = 30\text{A}, V_D = 15\text{V}, V_{CIN} = 15\text{V}$	-	1.7	2.7	Volts
Collector-Emitter Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}, V_D = 15\text{V}, T_j = 25^\circ\text{C}$	-	-	1	mA
		$V_{CE} = V_{CES}, V_D = 15\text{V}, T_j = 125^\circ\text{C}$	-	-	10	mA

**Thermal Characteristics**

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Each Inverter IGBT	-	-	1.0	$^\circ\text{C/Watt}$
	$R_{th(j-c)F}$	Each Inverter FWDi	-	-	0.95	$^\circ\text{C/Watt}$
	$R_{th(j-c)Q}$	Each Brake IGBT	-	-	1.66	$^\circ\text{C/Watt}$
	$R_{th(j-c)F}$	Each Brake FWDi	-	-	1.9	$^\circ\text{C/Watt}$
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module Thermal Grease Applied	-	-	0.036	$^\circ\text{C/Watt}$

**Recommended Conditions for Use**


Characteristic	Symbol	Condition	Value	Units
Supply Voltage	$V_{CC}$	Applied across P-N Terminals	0 ~ 400	Volts
	$V_D$	Applied between $V_{UP1}-V_{UPC}$ , $V_{N1}-V_{NC}$ , $V_{VP1}-V_{VPC}$ , $V_{WP1}-V_{WPC}$	$15 \pm 1.5$	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between	0 ~ 0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$	$U_P-V_{UPC}$ , $V_P-V_{VPC}$ , $W_P-V_{WPC}$ , $U_N \cdot V_N \cdot W_N \cdot B_r-V_{NC}$	$4.0 \sim V_D$	Volts
PWM Input Frequency	$f_{PWM}$	Using Application Circuit	5 ~ 20	kHz
Minimum Dead Time	$t_{dead}$	Input Signal	$\geq 2.5$	$\mu\text{s}$

# PM75RSK060


FLAT-BASE TYPE  
INSULATED PACKAGE

## Inverter Sector


**SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)**

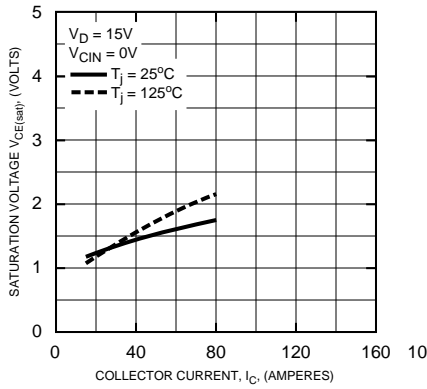


**COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)**

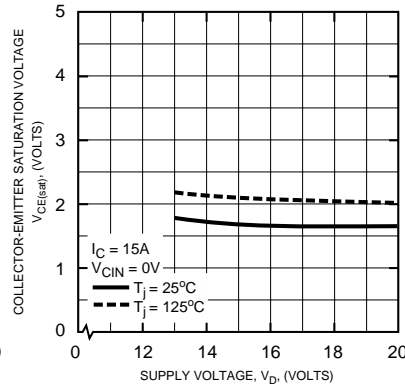


**OUTPUT CHARACTERISTICS (TYPICAL)**

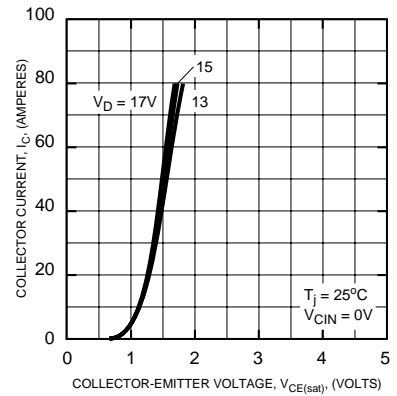


**SWITCHING TIME VS. COLLECTOR CURRENT (TYPICAL)**

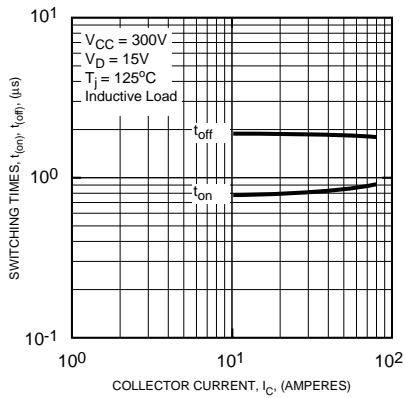


**SWITCHING TIME VS. COLLECTOR CURRENT (TYPICAL)**

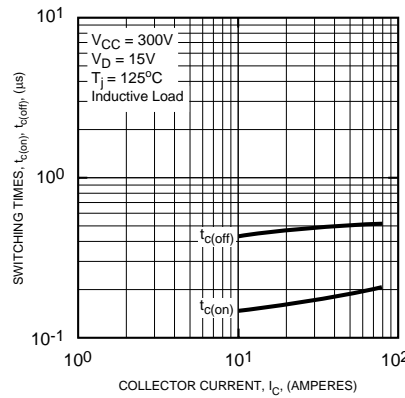

**REVERSE RECOVERY CURRENT VS. COLLECTOR CURRENT (TYPICAL)**

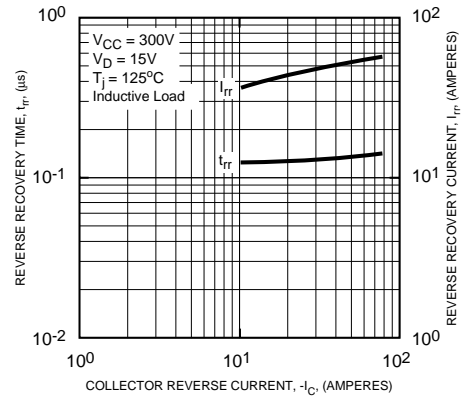

**FREE-WHEEL DIODE FORWARD CHARACTERISTICS (TYPICAL)**

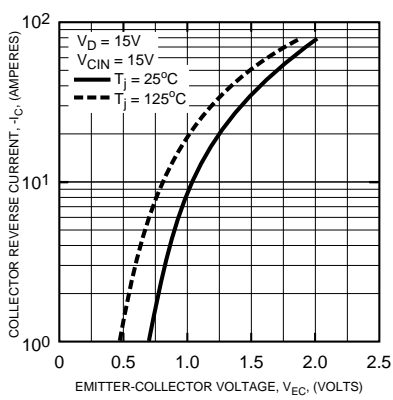


# PM75RSK060


FLAT-BASE TYPE  
INSULATED PACKAGE

## Inverter Sector

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (Each IGBT)

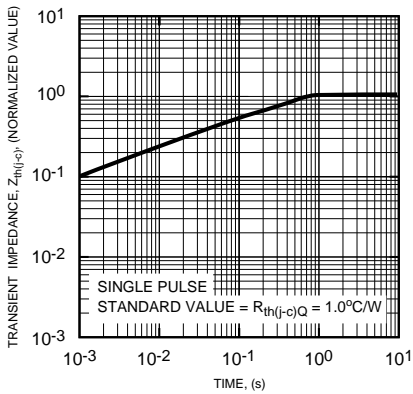


TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (Each FWD)

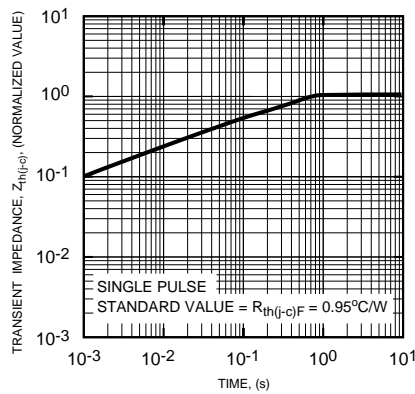


## Brake Sector


SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

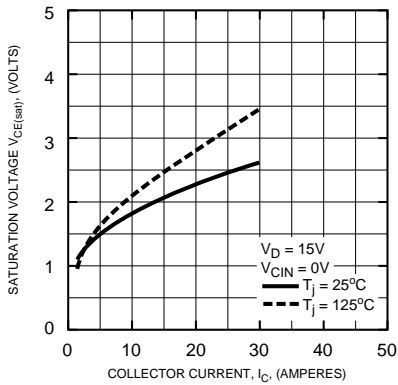


COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

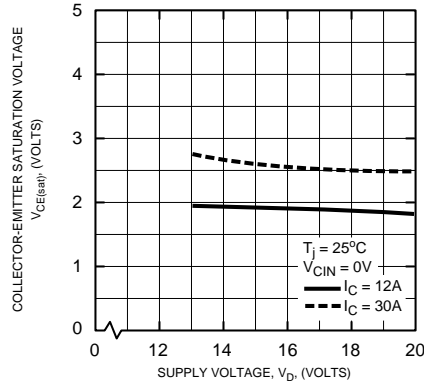


OUTPUT CHARACTERISTICS (TYPICAL)

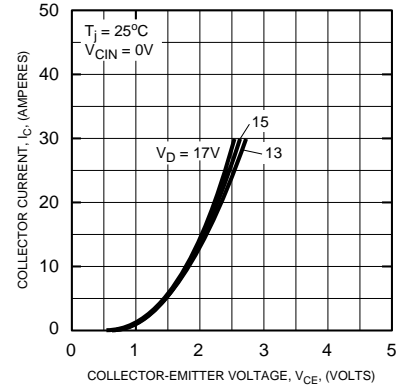

DIODE FORWARD CHARACTERISTICS

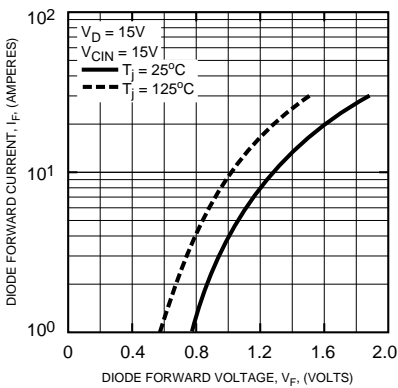

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT)

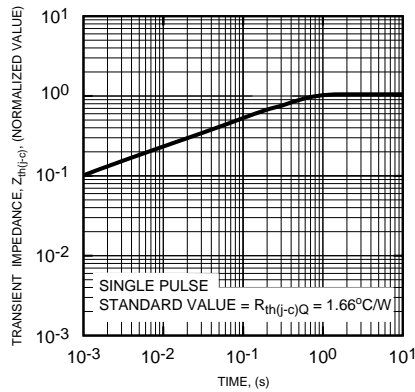

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (FWD)

