

Powerex General Purpose Rectifier Diodes are designed with high locking voltage capability and low forward voltage drop to minimize conduction losses. These are packaged in hermetic, ceramic Pow-R-Disc packages which can be mounted using commercially available clamps and heatsinks or fully assembled to a variety of air or water cooled heat exchangers.

### FEATURES:

- Low On-State Voltage
- Hermetic Ceramic Package
- Excellent Surge and  $I^2t$  Ratings

### APPLICATIONS:

- DC Power Supplies
- Input Rectifiers
- Plating Supplies

### ORDERING INFORMATION

Select the complete 12 digit Part Number using the table below.  
 EXAMPLE: RBK81663XXOO is a 1600V-6300A General Purpose Diode with a typical reverse recovery time of 25 $\mu$ s.

PART	Voltage Rating $V_{DRM}-V_{RRM}$	Voltage Code	Current Rating $I_{TAVG}$	Current Code	Reverse Recovery $t_{RR}$	Lead Code
<b>RBK8</b>	1600	<b>16</b>	6300	<b>63</b>	<b>XX</b>	<b>OO</b>
	1400	<b>14</b>				
	1200	<b>12</b>			25 $\mu$ s typical	

Revised: 10/3/2005

**Absolute Maximum Ratings**

Characteristic	Symbol	Rating	Units
Repetitive Peak Reverse Voltage	$V_{RRM}$	1600	Volts
Average On-State Current, $T_C=100^\circ\text{C}$	$I_{F(Avg.)}$	6300	A
RMS On-State Current, $T_C=100^\circ\text{C}$	$I_{F(RMS)}$	9896	A
Average On-State Current, $T_C=75^\circ\text{C}$	$I_{F(Avg.)}$	7500	A
RMS On-State Current, $T_C=75^\circ\text{C}$	$I_{F(RMS)}$	11781	A
Peak One Cycle Surge Current, 60Hz, $V_R=0.6*V_{RRM}$	$I_{FSM}$	95,000	A
Fuse Coordination $I^2t$ , 60Hz	$I^2t$	3.76E+07	A <sup>2</sup> s
Peak One Cycle Surge Current, 50Hz, $V_R=0V$	$I_{FSM}$	115,900	A
Fuse Coordination $I^2t$ , 50Hz	$I^2t$	6.72E+07	A <sup>2</sup> s
Operating Temperature	$T_j$	-40 to+190	°C
Storage Temperature	$T_{Stg.}$	-50 to+200	°C
Approximate Weight		2.5	lb
		1.13	Kg
Mounting Force		6,000 - 10,000	lbs
		26.6 - 44.4	Knewtons

The information on this datasheet is based upon Powerex testing and projected ratings and is subject to change without notice. Powerex makes no implicit or explicit claim to reliability, capability, performance or suitability of this product for a users application. Powerex makes no guarantee of future availability of this product.



# RBK8\_\_63XX

## GENERAL PURPOSE RECTIFIER DIODE

Powerex, Inc., 200 Hillis Street, Youngwood, PA 15697-1800 724 925 7272 WWW.PWRX.COM

**6300 Amperes 1600 Volts**


### Electrical Characteristics, Tj=25°C unless otherwise specified

Characteristic	Symbol	Test Conditions	Rating			Units
			min	typ	max	
Repetitive Peak Reverse Leakage Current	$I_{RRM}$	Tj=190°C, $V_{RRM}$ =Rated		100	150	ma
Peak On-State Voltage	$V_{FM}$	Tj=190°C, $I_{FM}$ =4000A			0.85	V
$V_{FM}$ Model, Low Level	$V_0$	Tj=190°C			0.688	V
$V_{FM} = V_0 + r \cdot I_{FM}$	r	15% $I_{FM} - \pi \cdot I_{FM}$			3.62E-05	$\Omega$
$V_{FM}$ Model, High Level	$V_0$	Tj=190°C			0.920	V
$V_{FM} = V_0 + r \cdot I_{FM}$	r	$\pi \cdot I_{FM} - I_{FSM}$			2.58E-05	$\Omega$
$V_{FM}$ Model, 4-Term	A	Tj=190°C			0.700	
$V_{FM} = A + B \cdot \ln(I_{FM}) +$	B	15% $I_{FM} - I_{FSM}$			-0.0209	
$C \cdot (I_{FM}) + D \cdot (I_{FM})^{1/2}$	C				1.730E-05	
	D				0.00395	
Reverse Recovery Time	$t_{RR}$	Tj=25°C, $I_{FM}$ =400A $di_R/dt = 25 A/\mu s$		25		$\mu s$


### Thermal Characteristics

Characteristic	Symbol	Test Conditions	Rating			Units	
			min	typ	max		
Thermal Resistance							
Junction to Case	$R\theta_{jc}$	Double side cooled		0.010	0.0115	°C/Watt	
Case to Sink	$R\theta_{cs}$	Double side cooled		0.0015	0.002	°C/Watt	
Thermal Impedance Model	$Z\theta_{jc}$	Double side cooled					
$Z\theta_{jc}(t) = \sum(A(N) \cdot (1 - \exp(-t/\text{Tau}(N))))$		where:	N =	1	2	3	4
			A(N) =	1.220E-04	8.786E-04	4.154E-03	6.843E-03
			Tau(N) =	5.860E-04	1.409E-02	1.814E-01	1.208E+00

### Maximum On-State Voltage Drop

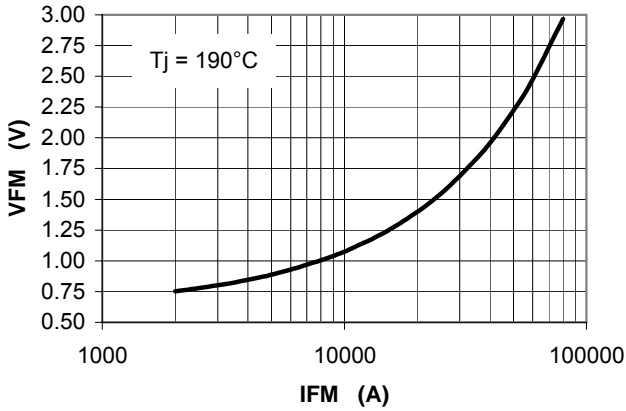


### MAXIMUM TRANSIENT THERMAL IMPEDANCE

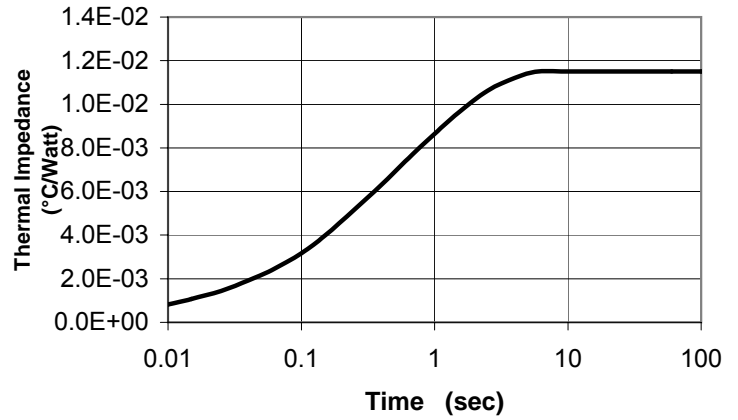


### Maximum On-State Power Dissipation

SINE WAVE

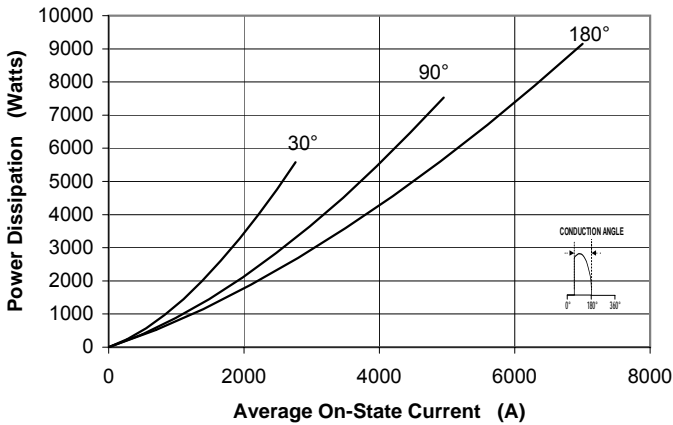


### Maximum Allowable Case Temperature

SINE WAVE

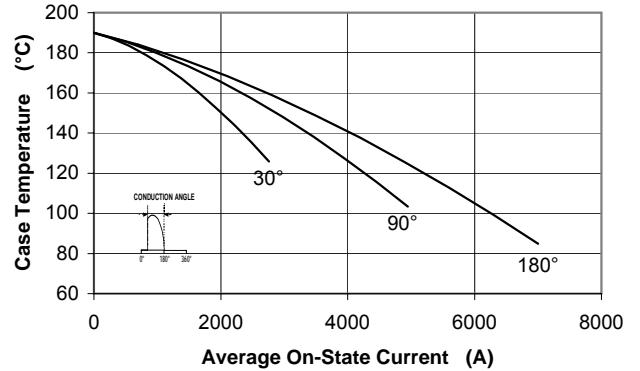

### Maximum On-State Power Dissipation

SQUARE WAVE

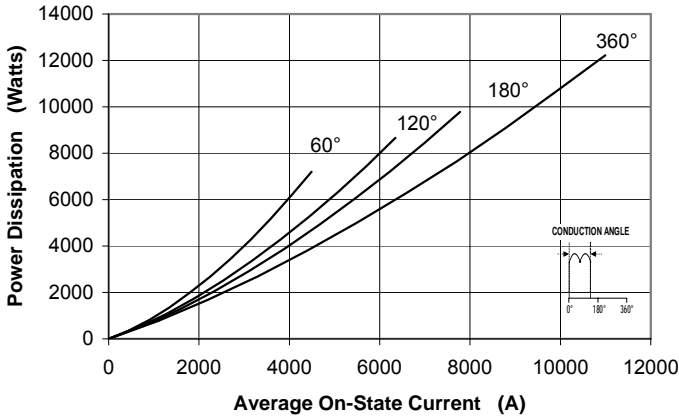

### Maximum Allowable Case Temperature

SQUARE WAVE

